


REPLACE GASKET ON DECK HATCH (DH) & LUXURY DECK HATCH (LDH)

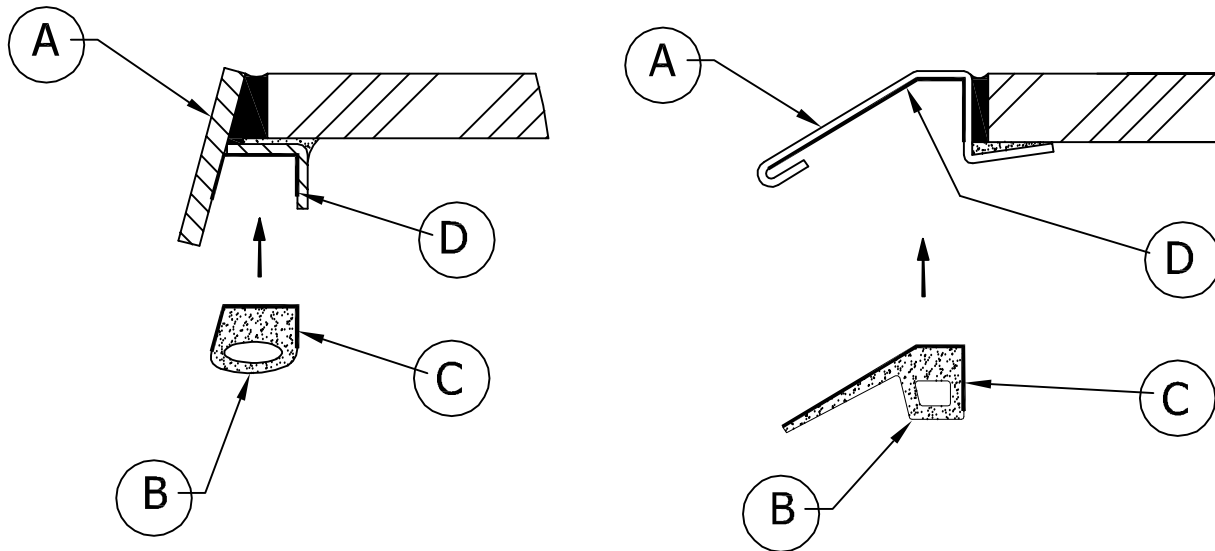

1. To clean gasket (B) with cloth.
2. Move silicone out from place (D) on Frame (A) and use cleanser, then fill proper silicone.
3. Glue gasket (B) to place (D) on Frame (A) and press properly. Keep it two days more for adhesion entirely.