





>>PROtect tapes

Explorers of innovation

PROtect tapes are a broad range of protective tapes and solutions for dinghies, racing, cruising and super yachts.

Our products address serious chafing, abrasion, scratches, damages, ageing and wear.

The critical factor to success has been the combination of unique technical film experience from polymer and adhesive specialists and sailing expertise of professional sailors.

They are effective solutions for the owners, captains, mast and boat builders, shore teams, riggers and sailmakers looking for superior and competitive product to enhance performances and ultimately win the race or simply reliability and have a safer cruising.

The years since **PROtect tapes** was established in 2007 have been extraordinary.

We have grown from a tiny startup to become a leading company focused on the niche area of tapes and solutions for the yachting industry.

Today, it is young, vigorous, brash, ambitious, full of ideas and dreams due to smart people, unique equipment, steady hands and smiling faces.

We use our bikes as much as we can, drink squeezed orange juice and gossip about life.

We are **PROtect tapes**.



Excellence in safety, health and environmental



Focus on customer satisfaction, total quality and reliability



Continuous improvement to become a cost effective producer of high quality products



Encouragement of innovation, entrepreneurship and reward for achievement



ent Empowerment of n, employees to create hip real value for our customers and ent ourselves





CHAFE is a pressure sensitive UHMWPE tape (ultra high molecular weight polyethylene) film with a very strong acrylic adhesive.

It has high resistance to abrasion (15 times more resistant than carbon steel), self-lubricating properties and extremely low coefficient of friction.

The result is a very tough material, with the highest impact strength of any thermoplastic presently made.

The product is available in black and translucent and various standard widths. Custom slitting, cutting and die cutting on demand.

Typical applications:

- dragging lines over the deck
- mooring ropes area
- mast (front and shave box) and leading edge spreaders
- under the boom to protect it from spinnaker/gennaker sheet
- pad eyes on the deck for blocks and hardware
- daggerboards and bearings
- stanchions
- battens and sails

Part code	Product	Quantity	Size
PCK001	PCB250 PCB500 PCT250 PCT500	1 piece each	51mm x 500mm 2" x 19.68"
PMK033S		for blocks - 2 pcs	c=200mm c=8"
РМК033М		360°	c=240mm c=9.45"
PMK033L	Dentoo		c=300mm c=12"
PMK034S	PCB500	for blocks - 2 pcs	a=103mm b=130mm a=4.06" b=5.12"
РМК034М			a=158mm b=200mm a=6.22" b=7.87"
PMK034L		60° 60°	a=198mm b=250mm a=7.80" b=9.84"



Part code	Color	Adhesive	Thic	kness	Wi	dth	Len	gth
raitcode	Color	Autresive	mm	mil	mm	in	m	yds
PCB076			0.076	3	standard	standard		
PCB125			0.125	5	25 51	1 2	16.5	18
PCB250			0.250	10	152 min 6.35	6 min 1/4	10.5	10
PCB500	Black		0.500	20	max 660	max 26		
PCB1000	DIACK		1.000	40				
PCB1570			1.570	60	standard 50 and 200	standard 2 and 8	15	16.4
PCB2360			2.360	93	min 6.35 max 610	min 1/4	13	
PCB3170		Acrylic w/liner	3.170	max 24				
PCT076		Acrylic W/IIIIer	0.076	3	standard	standard		
PCT125			0.125	5	25 51	1 2	16.5	18
PCT250			0.250	10	152 min 6.35	6 min 1/4	10.5	10
PCT500			0.500	20	max 660	max 26		
PCT1000	Translucent		1.000	40				
PCT1570			1.570	60	standard 50 and 200	standard 2 and 8	15	16.4
PCT2360			2.360	93	min 6.35	min 1/4		
PCT3170			3.170	120	max 610	max 24		

CHAFE above 500 micron (20mil) are normally without adhesive; available with adhesive on request. Product codes PCTXXXXCA or PCBXXXXCA

SHOCK & SHIELD

SHOCK is a further evolution of CHAFE products, to resist to abrasion and shocks from blocks, press locks, snap and halyards shackles.

The first evolution is made of alyphatic polyurethane resin film laminated between CHAFE and a modified acrylic adhesive and finally protected by a siliconised paper to make easy and friendly handling, die cut and application. Any CHAFE film can be used, ideally 250 or 500 micron (10 or 20 mil).

The product is made on demand and tailor made in the width, length and eventually shape by plotting and die cutting.

The further step is PSX made of lightweight, flexible, microcellular, open cell suitable for multiple high impact protection. It absorbs more energy than comparable materials, nearly twice. The impact is also distributed over a greater area without through the material and to the other side.

SHIELD has been specially developed for protecting susceptible areas of the boat from damage from shock, chafe and scuffing. The films are produced from high grade polyurethane, which has excellent high impact resistance, excellent transparency and high gloss. The films are coated with quality acrylic adhesive with very good long term ageing properties. Tested in most extreme climatic conditions, the films will not crack, discolour or shrink.



- soft loops and pad eye areas
- mast, boom and spreaders
- bowsprit
- windows/hatches

SHOCK

			Thick	ness	Wic	lth
Part code	Color	Adhesive	mm	mil	mm	in
PSB250			0.250	10		
PSB500	Black	Acrylic w/liner	0.500	20		
PST250	Translucent	Acrylic W/liner	0.250	10	min 38	min 1 1/2
PST500	ITAIISIUCEIIL		0.500	20	max 660	max 26
PSX250XXXYY	Black		0.250	10		
PSX500XXXYY	DIdCK		0.500	20		

PSX: Estreme impact protection are made on demand using diffrent materials listed on the table on the right and highlighted in orange

Max lenght is 16.5m (18 yds) nevertheless SHOCK has been designed to locally protect limited areas therefore we suggest maximum few meters. Plotting service available on all SHOCK and SHIELD products



PSX structure

SHIFLD

			Thick	kness	Wie	łth	Max L	ength
Part code	Color	Adhesive	mm	mil	mm	in	m	ft
PSC190	Clear	Acrylic w/liner	0.190	7.5	standard 50, 100 max 500	standard 2 and 4 max 20	50	54.6

PSX code XXXYY

Der	sity	71.1	mm	2	3	4	5	6	9.5	12.7
g/l	lb/ft ³	Thickness	mil	80	118	158	197	236	374	500
144	9					14404		14406	14410	14413
192	12			19202	19203	19204		19206	19210	19213
240	15			24002	24003	24004		24006	24010	24013
320	20			32002	32003			32006	32010	
400	25			40002	40003					







MASK is the rigging tape.

Riggers and sailors call our best seller PMG050 the millionaire tape or gecko tape, a mast have into the sailor trousers pockets.

The tape combines highly tensilized skived modified PTFE (a synthetic fluoropolymer) with a high temperature silicon or acrylic adhesives.

They have the highest tensile strength per unit, toughness and high temperature resistance of any PTFE product.

The low friction coefficient together with the resistance to abrasion offers an efficient solution to many wearing and tearing issues.

Typical applications:

- running rigging
- bobstays and strops
- standing rigging, spreaders and turnbuckles
- forestay, backstay, runners and other cables
- all uneven or irregular surfaces
- ideal for wrapping parts where build up can occur

Two boxes protect your Millionaire tape either inside the tools box or when you climb on the mast

Part code	Description
PMY012	Box for storage any mask tape of up to 12.7mm (1/2") x 33m (36yds)
PMY025	Box for storage any mask tape of up to 25mm (1") x 33m (36yds)



					Thic	kness		Elongation at break		١	Width	1			m	nght m
Part code	Color	Adhesive	Liner	fil	lm	adh	esive				dard			max	yds	yds
				micron	mil	micron	mil	%	mm inch		32 1.25		102 4	564 21.5		33 36
PMO064	Orange			64	2.5	38	1.5									
PMB064	Blue			64	2.5	45	1.8	140								
PMG050	C			50	2			1.0								
PMG076	Grey			76	3											
PMH125L				125	5											
PMH250L		Silicon	yes	250	10											
PMH500L				500	20	38	1.5	300								
PML050	Light Grey			50	2	30	1.3	300								
PML125				125	5											
PML250L				250	10											
PML500L			yes	500	20	1										
PMA050	Grey	Acrylic		50	2			140								

L at the end of the part codes means product with liner. PMG050, PML050 and PML125 are available with liner on request. PM0064, PMB064 available in 25mm (1°) and 32mm (1° 1/a), PMG076 and PMA050 available in 25mm (1°), PML125 available in 25mm (1°), S2mm (1° 1/4) and 51mm (2°) only.

Standard Other widths on demand.

HEADFOIL

HEADFOIL is the ideal protection against damages to plastic, composite or metallic headfoil from severe contact abrasion of rotating spinnaker/guy or gennaker sheets during internal gybe or kite drop.

It is a combination of modified UHMWPE polymers films and strong acrylic or silicon adhesives.

The standard product is suitable for small boats up to 12m (40') and available in two colors: translucent (PHTXXX) or black (PHBXXX).

PHPXXX (high performances), available in light grey with silicon adhesive, is strongly recommended for larger and grand prix yachts or whenever a superior resistance is required.

The differences between the two versions are the polymers, the temperature resistance of the films and the type of the adhesives.

All products are very easy to use and apply because already cut to the standard sizes of any headfoil systems.

Custom widths and lenghts are available on demand.

XXX stands for the standard width (001-002-003)

PHTXXX, PHBXXX and PHPXXX are available in any length and in this case the part code are PHTXXXC, PHBXXXC and PHPXXXC.

Part code	Color	Thick	kness	Wi	dth	Len	gth	Compatible headfoil system					
Fait code	Color	micron	mil	mm	in	m	yds	Compatible neadion system					
PHT001	Translucent							Harken Unit 0					
PHB001	Black			34	1.34	1.5	1.64	J-Lift 5085					
PHP001	Light grey							Tuff Luff 1205 and 1706					
PHT002	Translucent							Harken Unit 1					
PHB002	Black	250	10	40	1.57	2.0	2.19	J-Lift 5100 and 5095/R					
PHP002	Light grey							Tuff Luff 2206 and 2506					
PHT003	Translucent							Harken Unit 2&3					
PHB003	Black			51	2.00	4	4.37	J-Lift 5115 and 5164					
PHP003	Light grey							Tuff Luff from 3007 to 7608 and TL1003/4					











LOOPX are the strongest man made adhesive tapes.

Tapes are available in two versions, reinforced with Endumax ®, a lightweight, highly effective and flexible UHMWPE tape and another one with Dyneema ® Fibers, an ultra high strength fiber made of UHMWPE.

In the PLT series the thin and strong adhesive has two functions: to hold either the fibers or tapes in the desired position and to guarantee the adhesion between the layers when the loop is manually made.

PLS series has been designed to make laminated loops because the surface of the tape is treated for heatsealing.

With LOOPX high load and small loops no longer require skills and expertise, complex sequence of operations, complicated steps and tools.

Anybody can make his own loop in the length required, even very small and in just few minutes. It is very practical, translucent, strong and light.

Typical applications:

- bobstays
- runner attachments
- soft attach block



				Gaug	е	Tape	width	Len	gth	Working load*		Fiber	s/tape
Part code	Color	Adhesive	Liner	micron	mil	mm	in	m	yds	Kg	Lbs	Quantity/Width	type
PLT0760120613T						12	1/2			515	1134	1 x 6mm (1/4")	Endumax® tape
PLT0760190613T						19	3/4			1030	2269	1 x 12mm (1/2")	Endumax® tape
PLT0760250233T	Translucent	Acrylic	WKr	76	3					515	1134	3 x 2mm (5/64")	Endumax® tape
PLT0760250133F						25	1	3	3.3	1130	2489	3	Dyneema® UD fibers
PLT0760250133W										4120	9075	3 x 5	Endumax® twisted fibers
PLS000012X1				210	8					1920 4229		1 x 12mm (1/2")	Endumax® tape
PLS000019X1				210	8					3040	6695	1 x 19mm (3/4")	Endumax® tape

Endumax® is an ultra high molecular weight polyethylene (UHMW-PE), produced by Teijin. Endumax® is a lightweight, highly effective and flexible PE-tape. Dyneema® and Dyneema®, the world's strongest fiber $^{\text{IM}}$ are trademarks of DSM. Use of these trademarks is prohibited unless strictly authorized.

Liner WKr = White Silicon Kraft

KIT

KIT are a selection of tapes and disks fully compliant with class rules, die cut, ready to apply on the small boats and dinghies.

They have been designed with the support of professional coaches, Olympic and world champions and contain a large selection of CHAFE, MASK, SHRINK and WRAP to cover all possible needs.

On top of the above ready made products, CHAFE is the material used for patches kits available in different sizes (from A6 to A4) and quantity ready to be applied on the boat. Kits currently available:

- Optimist
- Laser ® ILCA
- Moth
- 29er, 49er/49er FX
- Nacra 17
- SB20
- Topper
- Dinghy 12'
- J70
- Melges 20 & 32

RS21



_	l	l	Bowsprit	Pole launc	Kite throat	Jib luff/he	Cross bear	Centreboa	Traveller E	Rudder	Mast step	Mast colla	l op mast s	Mast front	Sprit	Gaff	Outhaul	Boom	Vang	Turnbuckle	Mast benc	Tiller or till	Companio	DIOCKS	Cambers	Kigging Hahard av	Spreaders	T Ball	Tip bolts	Mainsheet	Control lin	Trapeze sh	Foot strap	Stanchions	Pulpit	Kite pad e	D1/V1	Hatch	Interior/kit	Wing
Boat	Part code	Pieces	À	ď	×	5	U	U	⊢	~	2	2	- -	1 2	-	O	0	m	>	F	2	⊢ !	ا ا		ء اد	Y	Ū	<u> </u>	F	2	O	F	ŭ	St	ā	¥		픠	드	15
Optimist	PMK066	29		L	L	Ц		•		•	•	\perp	\perp	•	•	Ш	•	_		4		4	4	1	1	1	1	1	╙	L	L		Ц		ᆜ	Ш	\perp	Ш		L
	PML001	2									•	•		\perp										\perp						L			Ш		┙			Ш		
	PML002	1									•																								╚					
Laser ® ILCA	PML003	13						•			•	•					•				-	•		Τ	Τ	Τ			Г						П		П		П	
Laser - ILCA	PML004	2				П																	T	T	T								П		П		П	П	П	Г
	PML007	5				П		•																											П				П	
	PML008	4				П			•				Τ											T	T				Г	Г			П		П		П			Г
Moth®	PMK001	8						•		•	T	T					•	•		•			T	(•	•				Г			П	П	П		T	П	П	•
29er ®	PMK029	10	•	•	•	•					T	T	T	T					•	•		T	T	T	T	T				Г			П	П	П	П	T	П	П	Г
49er/49er FX	PMK049	28	•	•	•	•		•		•	•	T	T	•			•	T	•	•	T	T	T	T	1		•			•	•	•	•	П	П	П	T	П	П	Г
Topper	PMK078	1									•													T	ı	ı							П	П			T		П	Г
	PMK062	31	•		•	•	•	•		•				•			•	•		•					•								П	П	П		T	П	П	
Nacra 17	PMK063	2				П		•				T	Т									T	T	T	Т	T	Τ		Г	Г			П	П	П		П	П	П	Г
	PMK064	8	•			П				T	T	T	Т	T						T	T	T	T	Т	Т	T	Τ	Τ	Г	Г			П	П	П		П	П	П	Г
SB20	PMK020	10	•	•	•	П							T	•							T	T		T	•		T			Γ			П	П	П	•	П	П	П	Г
Dinghy 12'	PMK120	28						•		•		•	T	•		•	•	•		•	•			T	(П	П	П		T		П	Г
RS21	PMK021	14	•	•	•									•								•	((П	П	П		T		П	Г
J70®	PMK067/PMK067T	10/14				П				\exists	T	T	T	•		П		T		T	•	-		T	1				T	Γ			П	П	П	П	T	П	П	Г
Melges 20	PMK910	1				П	П	П	T	\exists	\exists	T	T	•		П	\exists	\neg	\neg	T	T	T	T	T	Ť	Ť	T	T	T	T	Г		П	J	П	П	\neg	П	П	Г
	PMK912	1				П					T	T	T	•								T	T	T		T	T		Γ				П		П		T	П	П	Г
Melges 32	PMK999	9	•	•		•				•	•	T	\top		Ī			•		•		•		T					Т	T	Г		П	•	•	П	•	•	•	Г

All kits contain item list (see SB20 next page) and pokayoke instructions

PIFCES PER PACK

I ILCLO I LIX	•	, ,	_	١,				
Thickness micron mil		125 5	5		25	50 0		500 20
Part code	51 × 152	A5	A4	51 × 152	125 x 152	A5	A4	A4
PMK002	2			2	2	Г	Г	
PMK040		1				2		
PMK050							1	2
PMK060			1				2	
PMK070								4
PMK080						Г	4	

MAST PAD CODES FOR MELGES 20 AND 32 upon technology

 CHAFE (p. 5)	SHOCK (p. 6)	PSX(p. 6)	Width / Lengt
 PMK010	PMK910	PMK510	152 mm (6") x 0.8 m (31.5")
 PMK012	PMK912	PMK512	180 mm (7.1") x 1 m (40")


#	Part code	Gauge	Color	Width	Length	Qty	Details
1	PCB500	500	Black	180	0,18	2	Front kite block wearing and tearing the gealcoat
2	PCB500	500	Black	180	0,18	2	Rear kite block wearing and tearing the gealcoat
3	PCT250	250	Translucent	60	0,40	1	Improve exit and drop of the kite/sliding over the deck
4	PCB250	250	Black	150	0,80	1	Bottom part of the mast
5	PML125	125	Ligth Grey	51	1,65	2	Cover both sides of the bowsprit case to improve the sliding
6	PML125	125	Ligth Grey	120	1,85	1	Wrap the bottom of bowsprit for sliding improvement
7	PML050	50	Ligth Grey	19	10,00	1	All purposes/rigging





WRAP & FUSING






Products are available in black or white.

The narrow tape is ideal for rigging, screw terminals, electrics whereas the special wide rolls create a flexible, long lasting, good looking instant welding waterproof mast collar that will not leak.


It is easy to apply and fast and friendly to be removed.



This tape remains non-tacky to the touch and does not adhere to other surfaces, or substrates and insulates with single wrap, thereby reducing labor time and cost.gamating modified polyisobutylene tapes, designed to stretch Typical applications:

- rigging, hardware and mast collar
- electrics
- spreader pins ad turnbuckles
- ideal for wrapping parts where build up can occur





WRAP

Part code	Color	Thickness		Elongation at break	Width		Length	
		micron	mil	%	mm	in	m	yds
PWB500	Black	500 20 700		700	25, 100	1, 4	2, 10	2.2, 11
PWB800		800	31.5	900	150, 250	6, 10	10	11
PWW500	\	500	20	800	25, 100	1, 4	3, 5	3.3, 5.5
PWW800	White	800	31.5					
PWB2MM	Black	2mm	80	900	150, 250	6, 10	10	11

FUSING

									ı
PFB500	Black								ı
PFG500	Grey	500	20	500	25	1	3	3.3	ı
PFW500	White	300	20	300	23	1			ı
PFC500	Clear								ı

BOW # is a new range of stickers for bow number and advertising made of bioplastic films that use renewable resources to reduce environmental impact. The solution has been designed for a sustainable end of life while guaranteeing similar performances of traditional products.

At the end of the racing series the sticker removed from the boat can be disposed with the organic waste because made of biodegradable and compostable materials.

Unfortunately some stickers do peel off from the hull while racing because of poor application, water splashes and sprays, then dragged by the waves, currents and tides and generally end up on the beaches or deposit on the bottom of the sea.



The potential damage caused by the stickers released at sea is mitigated by rapid biodegradation.

The marine biodegradation of material used for PROtect **BOW** # takes place even in natural conditions, such as the marine environment, relatively quickly. In fact, samples of were exposed to marine sediments taken from the coastal area and the biodegradation was followed by monitoring the metabolization carried out by bacteria that "digest" the bioplastic and the biodegradation have been achieved relatively quickly, less than 1 year.

In particular, the biodegradation of the materials tested was more than 90% absolute or relative to a reference material, such as cellulose.


Bioplastic films are suggested for 7/10 days events or shorter.

We offer a turn key solution for racing event organizers by printing, including variable data and die cutting to supply the whole stickers set event.

Typical applications

- Bow numbers
- Hull advertising

Part code	Color	Fac	Adhesive	Lir	ner	Recommended events	
rait code	Color	Composition	Thickness	ranesive	Type	Thickness	Recommended events
PBW001	White	Compostable film	60	Acrylic	Glassine	50	7/10 days



For more info on ETV



The front is a white film, the adhesive is a permanent acrylic on the cold and the whole set is biodegradable and compostable with OK compost according to the European standards UNI EN 13432. The laboratory tests supervised by the Italian Institute of Plastics (IIP) were verified by Certiquality, as part of the European Commission's "Environmental Technology Verification" (ETV) pilot program

CUSTOM PROJECTS

CUSTOM PROJECTS is a new service of PROtect tapes for our demanding clients looking for tailor made solutions.

Mast, boom, spreaders, deck, pad-eyes very often require unique sizes and shapes, we have therefore decided to create a team totally dedicated to focus to convert our produycts in special parts perfectly matching your needs.

Our team is closely work with you and design the parts you need, eventually modify them after a preliminary test and when approved, we will plot and die cut them using the most advanced technology available on the market. Each part will be on file for further orders.

CHAFE, SHOCK, SHOCK PSX, SHIELD, MASK (all products on liner) can be cut by **CUSTOM PROJECTS**.



"Our challenge to break the world sailing speed record was born when Xavier Lepercq, Benoit Gaudiot and I met at EPFL (Ecole Polytechnique Fédérale de Lausanne) in 2018. We were participating in a university radio-controlled foil boat competition, and PROtect tapes was already supporting the EPFL team with innovative and customized solutions.

In 2019, we launched the SP80 challenge: breaking the world sailing speed record and reaching 80 knots with a kiteboat. Today our project has evolved into a company, with a passionate and determined team of about 50 engineers, communication professionals, students and volunteers. Keeping in mind the support PROtect tapes gave us during our student years, it was obvious to have them by our side in this adventure.


On the market, there is a large quantity of tapes that can be used to protect, repair, and fairing certain parts of our prototypes and our boat, but it is not easy to find a really adapted, simple and clean solution that solves a given issue. With PROtect tapes we have an innovative solution for all our adhesive needs. They have the knowledge and flexibility to always offer us the right products that fit our needs. This is a huge asset that simplifies a multitude of small tasks for the team and the development of our prototypes.

Our record-breaking boat will be in the water in 2022 for her first sail and it is clear that PROtect tapes products will be on board when we will attempt the record."

[Mayeul van den Broek - SP80 Co-founder & General Manager]

PROtect tapes is Technical Supplier to SP80 - www.sp80.ch



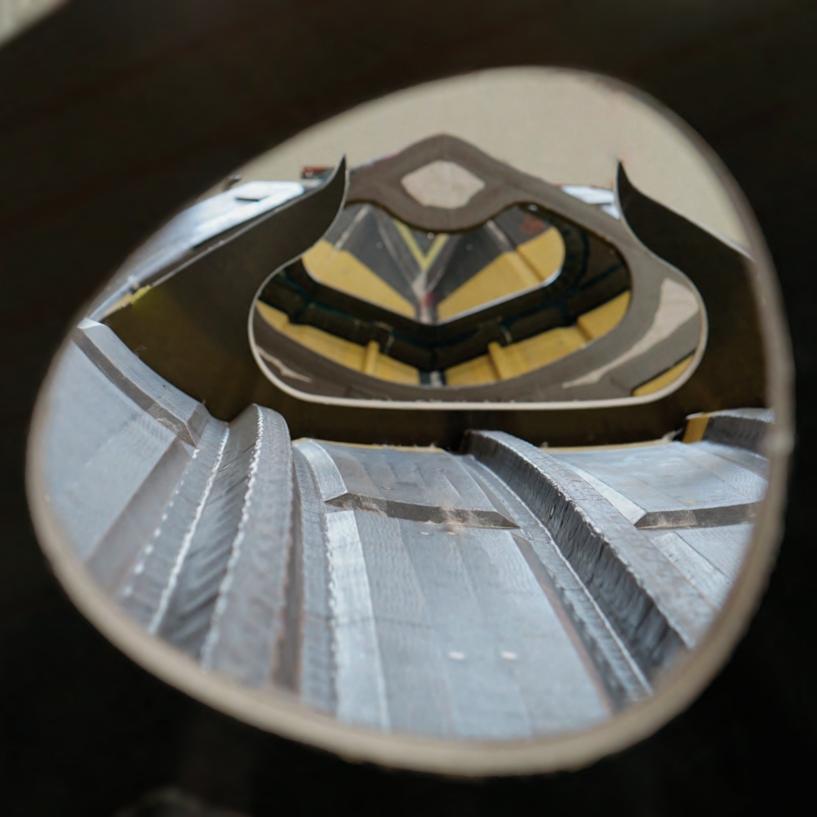

ROPE & SHRINK

ROPE is a smart and clever idea to identify forever ropes, halyards, running rigging and sheets on-board, into the container or van.

It is a heat shrink polyolefine tube with shrink ratio 2:1, available in different diameters to cover all possible needs.

Simply insert the tube at the end of rope, gently heat the tube using a suitable heat gun, hair dryer or just boiling water and the tube will wrap up it.

The material is writable with a permanent marker pen to have handy some relevant information (use, manufacturer, configuration, sailing hours, etc) and log it using the unique serial number.

Printing of your logo, variable data and other colors on demand.

Typical applications:

- mooring lines
- ropes
- hayards, running rigging and sheets

SHRINK are PTFE heat shrink tubes providing a state of the art method for the application of a tight, protective covering to items that will be subjected to the tough conditions.

It is the ideal method for the application of a tight, protective jacketing to items that ultimately will be subjected to extremes of heat, corrosion, shock, moisture, or other critical environmental conditions.

Provided in the expanded state, heat shrinkable tubing shrink wraps intricate and irregular shapes with a simple application of heat.

The application of heat shrink tubing extends life, increases reliability, and improves performance of the boat hardware.

SHRINK has ratio 4:1. The product requires at least 650°F/340°C to recover.



Part code	Color	Diameter	unshrinked	Diameter	Length		
Part code	Color	mm	in	mm	in	mm	in
PRW125-2		12.50		6.25	1/4		
PRW190-2		19.50	3/4	9.75	3/8		
PRW254-2		25.40	1	12.70	1/2		
PRW125-2S	White	12.50	1/2	6.25	1/4	100	4
PRW190-2S		19.50	3/4	9.75	3/8		
PRW254-2S		25.40	1	12.70	1/2		



ROPES & RIGGING

NAIN

D		Diameter u	unshrinked	Diameter	Min lenght		
Part code	Color	mm in		mm	in	m	ft
PHST125-4		12.70	1/2	3.66	1/8		
PHST158-4		15.88	5/8	4.52	5/32		
PHST190-4		19.05	3/4	5.70	3/16		
PHST222-4	Clear	22.23	7/8	6.20	7/32	1	3.3
PHST254-4	Oledi.	25.40	1	7.06	1/4	1	3.3
PHST317-4		31.75	1 1/4	8.82	5/16		
PHST381-4		38.00	1 1/2	10.20	3/8		
PHST508-4		50.80	2	14.12	1/4		

CHDINIV















SPK is an innovative system developed by PROtect tapes with the support of professional sailors to hoist gennaker and spinnaker much safer and to respect the environment.

Today there are various solutions to pack these sails, some very expensive, others less safe.

In designing the product, special attention has been devoted to the material and the choice went to of buttons made of recycled materials.

They must be applied to the luff tape of the sails.

They can be glued, sewn (SPK002 designed for sewing by sailmakers) or screwed (SPK001MS suitable for manual sewing only). All methods are very simple, no special skills required.

Additionally, the characteristic V-shaped groove is capable of retaining the thread till the sail is dropped. At first the end of the string is wrapped around the button then around the compacted sail and finally around the button again. The operation is very simple and can be performed by one person only.

There are no more knots, reducing the time required to compact the sail.

When the sail is set and threads broken, the sail gives all its propulsive force.

The broken threads are retained from the throat of each button, without falling into the sea, whether of wool or biodegradable and compostable material like our yarn ball SPK003; the crew will then remove them when the sail is lowered or at the end of the race.

Benefits:

- all materials are recycled and recyclable
- increased reliability and lower cost
- environmental friendly use
- less dexterity is required
- no need for help to compact the sail
- compliance to the regulations of our sport and the code of ethics
- standardization of the packing process
- possibility to pack only one portion of the sail
- reduction of the sail preparation time

Part code	Breaki	ng load	Len	ght	Recommended
	kg	lbs	m	yds	boat lenght
SPK003S	3.0	6.6	100	110	up to 70' (21m)
SPK003SX	3.0	6.6	650	711	up to 70' (21m)
SPK003M	4.5	9.9	80	88	over 70' (21m)
SPK003MX	4.5	9.9	500	550	over 70' (21m)

	Surf	Jouble	/w	o for	ing.		
Part code	Flat	Doon	Screw/r	Hole 1	Sewing	Description	Qty/pack
SPK001		•	•	•	•	Most flexible kit	8
SPK001MS		•			•	Manual sewing	8
SPK002	•					Sailmakers	100
SPK002L (large)	•					Sailmakers	100







SKID & NIGHT



SKID series are anti slip tapes designed for racing yachts and boats.

Series 80 and 60 are solutions when heavy duty slip resistance is required because made of tough, durable, special stones capable to last longer, embedded in extremely strong, all weather polymer substrate coated with a powerful, high bond rubber pressure sensitive adhesive and liner.

Series 45 and 54 are anti slip resilient tape with low and heavy embossed anti-slip rubber coated PVC that has been engineered with an aggressive acrylic adhesive and liner.

Light weight, easy installation, conformability and durable anti slip qualities. Available in a wide range of colors to match you needs.

The offer is wide: narrow rolls and jumbo rolls that can be cut to size on site or easily create templates specifically for your boat.

NIGHT series are photolumiscent adhesive tapes suitable for signage.

Typical applications:

- boat deck and cockpit
- stairs and ladders
- any slippery surface that is walked on

SKID & NIGHT Color Length Width Part code 80 PAR080 1219 3.3 PAR060 PAG060 PAL060 PAP060 PAD060* 60 PAW060 PAV060 PAO060 PAR060 PAN060 PAC060 PAU060 PAE060 PAY060 PAC030 Smooth 54 PAB054 PAG054 PAI054 PAW054 PAC054 Resilient 2 18.3 PAB046 PAG046 46 PAW046 PAC046 Coarse Resilier 557 Photo PNP557 Lumiscent

^{*}PAD is available in 50mm only (18.3m, 3m and custom lenght on demand)

WING

WING is all you need for wingsails.

WINGLAR™ is a special membrane available in different gauges, all very strong, tough, clear or pigmented, biaxially oriented, heat shrinkable, printable film. The films have high shrink force for superior bundling capability, high tear, impact and abrasion resistance, high gloss, clarity, excellent printability and UV stability.

A strong membrane is useless without an equally strong double sided tape with carrier and asymetrical acrylic adhesive to perfect match the properties of the membrane and the carbon fiber frame.

The final seamless touch is given by a clear, thin layer to cover and protect the edges of the film.

Typical applications:

- Wing sails
- Cross beams

MEMBRANES

		Thick	ness	Wie	dth	
Part code	Color	micron	mil	m	ft	Applications
PWC013		13	0.50			
PWC016		16	0.65	1.6		
PWC019		19	0.75			Small wings
PWC025		25	1.00		5.25	
PWC032	Clear	32	1.25			
PWC038		38	1.50			Cross beam of smaller than 40'
PWC050		50	2.00			Cross beam of 40' and above
PWC075		75	3.00	3.3	10.8	AC45/48 and bigger

Available pigmented as well, MOQ applies. PWC075 was approved by ACM Committee for the 35th America's Cup

SINGLE AND DOUBLE SIDED ADHESIVE TAPES

Part code	Carrier Color		Adhesive	carrier		kness adhesive		Width		Length		Purpose	Notes	
T dire code			, tanesive	micron	mil	micron	mil	mm	in	m	ft			
PWD04739				25	1.0	88	3.45	19, 25, 50	3/4, 1, 2	50	164			
PWD04839	Polyester Clear		Acodic	13	0.5	95	3.75	17, 23, 30	3/4, 1, 2	50	104	Link betweek the membrane and the wing	Double sided adhesive tape	
PWD01357			Clear Acrylic	13	0.5	38	1.50	19, 25	3/4, 1	55	180			
PWS01328				23	0.9	37	2.36	50, 100	1, 2	66	164	Finishing tape	Single side adhesive tape	

On PWD series the adhesive quantity is per side





SPIRAL & HANG

SPIRAL are solutions to protect the composite standing rigging, frequently damaged by jib and gennaker sheets increasing the risk of equipment failure and esponential cost for replacement.

The product is spiral cut cable wrap made of PTFE, resistant to abrasion, expandable and applicable on standing rigging as it is or wrapped by MASK for more durable protection.

Typical applications:

- Standing rigging (V1, D1, stays, etc)
- Lifelines

Part code	Color	Internal Diameter A		Max Diameter B		Wall C		Pitch of helical cut D	
		mm	in	mm	in	mm	in	mm	in
PRS0318		1.59	1/16	12.70	1/2			6.35	1/4
PRS0476		3.18	1/8	25.40	1			6.35	1/4
PRS0635		4.76	3/16	50.80	2			9.53	3/8
PRS0794]	6.35	1/4	63.50	2 1/2	0.76	0.030	9.53	3/8
PRS0953	Tranlucent	7.94	5/16	76.20	3			11.11	7/16
PRS1270*]	11.11	7/16	101.60	4			14.29	9/16
PRS1588*		14.29	9/16	127.00	5			15.88	5/8
PRS1905*		17.46	11/16	152.40	6	0.81	0.032	22.23	7/8
PRS2540*		23.81	15/16	203.20	8	1.02	0.040	25.40	1







The lenght required is equal to the ration between the ID and the cable diameter. If the cable is 5mm and SPIRAL is PRS0476, 1 meter will cover 0.64m. ID of PRS0476 is 3.18, therefore 3.18:5 = 0.64. If the cable is 7mm, PRS0476 will cover just 0.45m because 3.18:7 = 0.45. The best ration is between 0.80 and 0.40. On deman from PRS1270 to PRS2540.

HANG is a gel grip tape made of PU that you can apply to the kitchen, bulkhead, toilet, navigation table and other places to hold and keep in place tools, pens, remote control, camera, phones, keys, mirrors and so on without slipping.

Washable, reusable, no adhesive residue.

Part code	Color	Thick	ness	W	idth	Lenght	
rait code	Coloi	mm	mil	mm	in	m	yds
PGC2000030050		2	00	30	1.2	5	5.5
PGC2000050050	Clear	2	80	50	2	٦	د.د







COMPOSITE



COMPOSITE are PTFE tapes either glass coated or plain suitable for mold release in demanding composite constructions.

Tapes and adhesive (silicon or acrylic) can withstand the most challenging requirements and extreme operating conditions.

The thickness range is wide matching applications requiring excellent release, dimensional and superior thermal stability.

Release of composite part from the tooling on ejection is also key benefit of a properly designed mold and release characteristics normally relate to the coefficient of friction of the molding surfaces and release tapes play an important role.

In fact, the lowest coefficient of friction is not a material property, but a result of the contact system therefore influenced by the hardness, thickness, uniformity and smoothness of the surfaces, even more critical for small or negative draft angles.

Typical applications:

male or female mold release

Part code	Color	Adhesive	Liner	fil	Gauge Adhesion Elongation Width at break		Adhesion		Adhesion		Adhesion				th	Length	
				micron	mil	micron	mil	N/cm	oz/in	%	mm	in	m	in			
PMF076L				76	3												
PMF125L	Brown		Yes	125	5	51	2 4	4.37	40	3	up to 1000	up to 39.37					
PMF150L				150	6												
PMC050		Silicon		50	2				3.28 30	30 140	25	1	33	36			
PMC050L	Grey		Yes	30		38	1.5	3 20			51 102	2 4					
PMC076	OIC,			7.		36	1.3	3.20			min 7	min 1/4 max 21.5					
PMC076L			Yes	76	3												

PMF and PMC series available with acrylic adhesives too.

DUCT & SEAL & NO LEAK

DUCT tapes are a high quality general purpose colored tapes made from polyethylene-coated cloth coated with a natural rubber and synthetic resin adhesive system.

Tapes will conform well to irregular surfaces and will not twist or curl during application, hand tearable and tears evenly across the web of the cloth and provides excellent water and abrasion resistance.

Available in the standard silver and seven other colors.

It can be used as a quality moisture and waterproof tape and for easy and quick fix, reinforcing, color coding, ductwork sealing and seaming.

SEAL are tapes are specialty masking tapes combining LDPE films and HDPE cloth coated with acrylic adhesive. They are hand tearable, resistant, residue free and highly weather resistant and waterproof, free residual after removal. These features offer many solutions for masking, protection, holding, splicing, seaming, sealing. Since they does not leave residue on floors and surfaces, it makes maintenance operation easier.

NO LEAK is similar to SEAL but especially designed for airtightening and waterproofing. Permanent bonding.



- moisture, waterproof and airtightening
- reinforcing
- color coding
- sealing
- seaming

DUCT

Part code	Color	Adhesive	Thick	ness	Wid	lth	Len	gth
T di C code	00101	runesive	micron	mil	mm	in	m	yds
PDS290	Silver							
PDW290	White							
PDB290	Black							
PDR290	Red			0.5			10	11
PDY290	Yellow	Rubber	90	3.5	50	2	25	27.3
PDO290	Orange							
PDL290	Blu							
PDG290	Green							



SEAL

Part code	Color	Adhesive	Thick	ness	Wio	ith	Len	gth
			micron	mil	mm	in	m	yds
PEW190	White							
PEC190	Clear	Acrylic	190	7.5	50	2	50	55
PEG190	Green							

NO LEAK

Part code	Color	Adhesive	Thicl	kness	Wic	lth	Len	gth
			micron	mil	mm	in	m	yds
PNR220	Black	Acrylic	220	8.86	100	4	2, 10	2.2, 22





INTERIOR & HAUL & EXTERIOR & NOSLIP



INTERIOR is the ideal solution for protection of delicate surfaces such as the boat interiors whether in construction, delivery, boat maintenance or racing. The product is a foam PE film laminated with LDPE and a removable acrylic adhesive.

EXTERIOR is a clear polyolefins UV treated with low tack acrylic adhesive for the protection of the deck, hull and any part exposed to atmospheric agents and easy peel.

It is suitable for the protection of surface finishes from dirt and scratches and available in two versions with medium and low tack.

HAUL are small triangles adhesive to be applied on the hull to locate the propeller and speed sensors for the correct positioning of the bands during hauling and launching. Available in kit of four pieces red (PMK031R) and black (PMK031B).

NOSLIP is a range different solutions to make navigation or life on a boat even safer and more comfortable. PON200 is a thick non slip soft fabric with a moltitude of uses available in black and white while POH200 provides grip hands on handrails also preventing bare hands freezing onto metal rails.



INTERIOR

Part code	Color	Adhesive	fili	Gau	ige adhe	sive	Adhe	Adhesion Elon at b		Width		Length	
			micron	mil	micron	mil	N/cm	oz/in	%	mm	in	m	yds
PIW2000	White	Acrylic	2000	80	10	0.4	1.0	9.1	<200	250, 625, 1250	10, 25, 50	25	27,3

EXTERIOR

PEX200	White	Acadic	80	3.15	10	0.4	0.8	0.1	>300	150, 300	6 12	500	550
FLAZOO	VVIIILE	Acrylic	00	3.13	10	0.4	0.0	7.1	-300	130, 300	0, 12	300	330

NOSLIP

Part code	Color	Siz	zes	Description
		metric	imperial	
PON200B	Black	50mm x 25m	2" x 27.3 yds	Third, and false
PON200W	White	100mm x 25m 1500mm x 1000mm	4" x 27.3 yds 59.05" x 39.37"	Thick soft fabric
POH200B	Black	25mm x 25m 50mm x 25m	1" x 27.3 yds 2" x 27.3 yds	grip hands on handrails preventing freezing onto metal rails



PROtect tapes® Via Pietrarubbia, 32D 47921 Rimini - Italy



T +39 0541 1646823 M +39 339 8867008 www.protect-tapes.com info@protect-tapes.com

Values presented have been determined by standard test methods and are average values not to be used for specification purposes.

Our recommendations on the use of our products are based on tests believed to be reliable but we would advise you to conduct your own test to determine their suitability for your applications. This is because we cannot accept any responsibility or liability direct or consequential for loss or damages as results of our recommendations.

PROtect tapes, WINGLAR, SPK and Pat'H logos are registered trademark of Pietro Parmeggiani S.r.l.